

QUIET ONE® POND PUMPS *For Submersible or Dry Applications*

FEATURES :



- ◆ Extremely quiet operation...noise level less than 45 decibels.
- ◆ Option of wet or dry application.
- ◆ Ease of service through simple snap on/off molded covers and removable magnetic drive impellers.
- ◆ Pond models include longer cord, foam pre-filter and nozzels for spray attachments.
- ◆ Patented Uni-Direction™ impeller eliminates need for noisy mechanical device. Allows pump to always turn in the correct direction immediately.
- ◆ High quality corrosion resistant ceramic bearings help ensure quiet operation and longer life.
- ◆ Small footprint with energy-efficient motor and high flow rates.
- ◆ Innovative “cooling chambers” provide air-cooling during dry use and water-cooling in wet applications.
- ◆ Flow control dials on 800 and 1200 models.
- ◆ Easy grip handles on 5000 and 6000 models.
- ◆ 115V 60 Hz or 220V 50 Hz models in all sizes.
- ◆ UL, cUL, CE, TUV-Gs Listed.
- ◆ 2 color design matches Lifeguard Aquatics line of products.

POND PUMPS		
Model	Suction	Discharge
800	Screen	1/2" Insert (1,27cm)
1200	1/2" MPT (1,27cm)	1/2" MPT (1,27cm)
2200	1" MPT (2,54cm)	1" MPT (2,54cm)
3000	1" MPT (2,54cm)	1" MPT (2,54cm)
4000	1" MPT (2,54cm)	1" MPT (2,54cm)
4000HH	1" MPT (2,54cm)	3/4" MPT (1,91cm)
5000	1" MPT (2,54cm)	1" MPT (2,54cm)
6000	1" MPT (2,54cm)	1" MPT (2,54cm)
9000	1 1/2" MPT (3,81cm)	1 1/2" MPT (3,81cm)
14000	1 1/2" MPT (3,81cm)	1 1/2" MPT (3,81cm)
16000	1 1/2" MPT (3,81cm)	1 1/2" MPT (3,81cm)





800

QUIET ONE 800	
230 Volt	120 Volt
50 Hz	60 Hz
14 Watt	13,5 Watt
A 0,1	A 0,24
840 l/h	220 gph
130 cm max ht	4.37 ft max ht

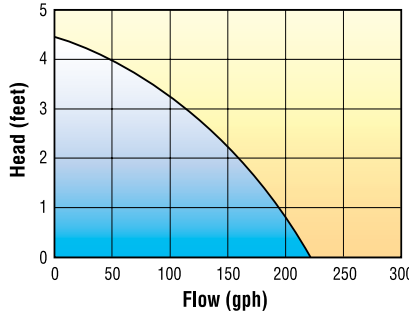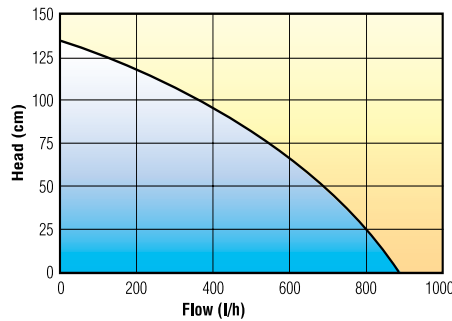



1200

QUIET ONE 1200	
230 Volt	120 Volt
50 Hz	60 Hz
23 Watt	25.5 Watt
A 0,21	A 0,4
1200 l/h	296 gph
170 cm max ht	6.1 ft max ht

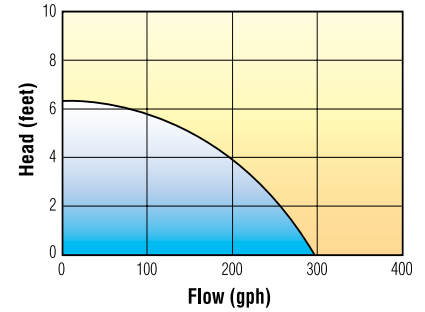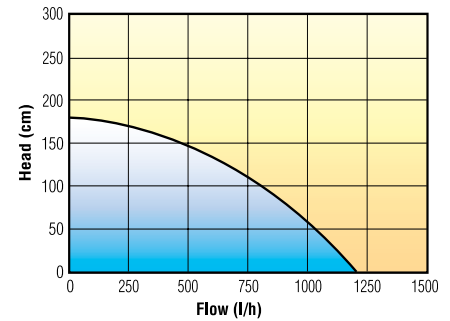



5000

QUIET ONE 5000	
230 Volt	120 Volt
50 Hz	60 Hz
85 Watt	110 Watt
A 1,09	A 2,48
5100 l/h	1330 gph
340 cm max ht	10.8 ft max ht

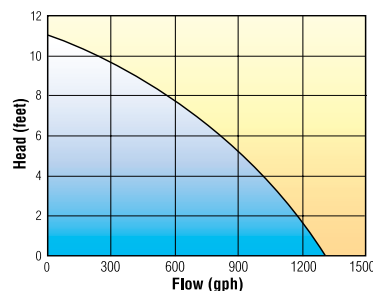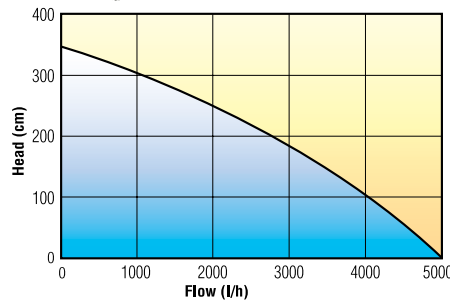

6000

QUIET ONE 6000	
230 Volt	120 Volt
50 Hz	60 Hz
110 Watt	140 Watt
A 1,4	A 3,18
5800 l/h	1506 gph
384 cm max ht	12.2 ft max ht

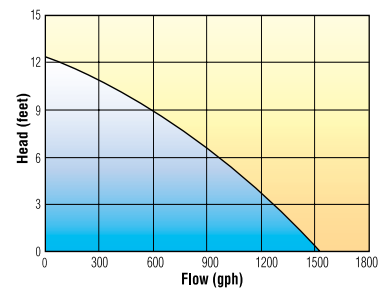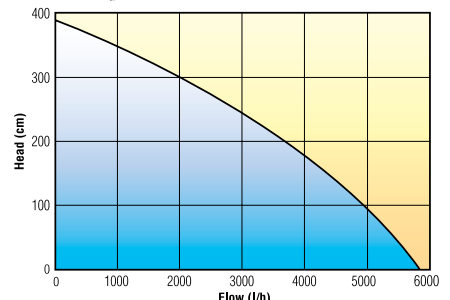



QUIET ONE® POND PUMPS

For Submersible or Dry Applications





2200

QUIET ONE 2200	
230 Volt	120 Volt
50 Hz	60 Hz
55 Watt	41 Watt
A 0,51	A 0,6
2200 l/h	581 gph
3.0 m max ht	9.8 ft max ht

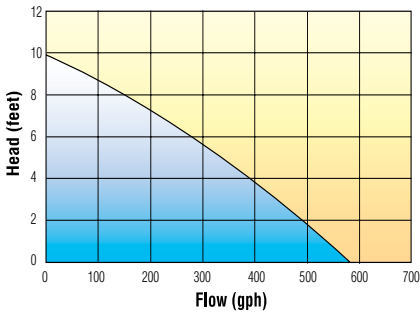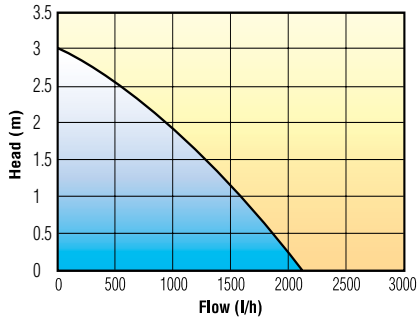



3000

QUIET ONE 3000	
230 Volt	120 Volt
50 Hz	60 Hz
55 Watt	40 Watt
A 0,50	A 0,66
3000 l/h	780 gph
310 cm max ht	10.5 ft max ht

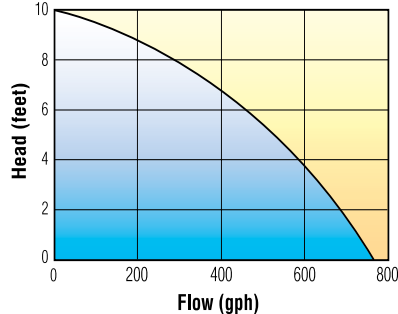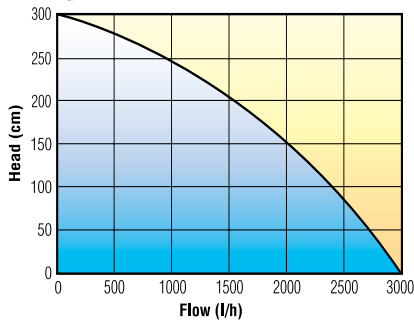



4000

QUIET ONE 4000	
230 Volt	120 Volt
50 Hz	60 Hz
60 Watt	50 Watt
A 0,55	A 0,79
3850 l/h	1017 gph
305 cm max ht	10.2 ft max ht

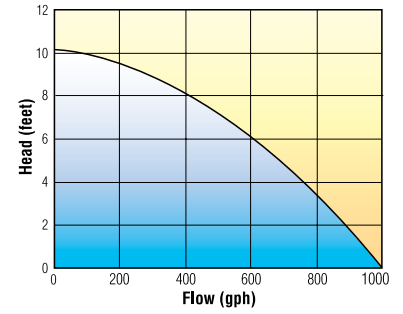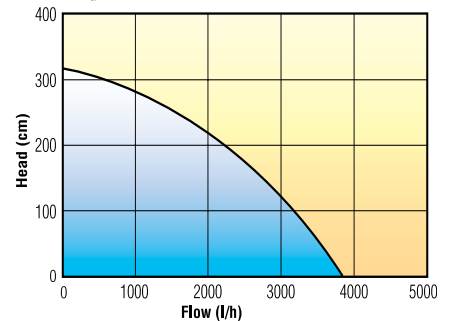

9000



QUIET ONE 9000	
230 Volt	120 Volt
50 Hz	60 Hz
140 Watt	145 Watt
A 1,2	A 3,8
8800 l/h	2328 gph
5.8 m max ht	19 ft max ht

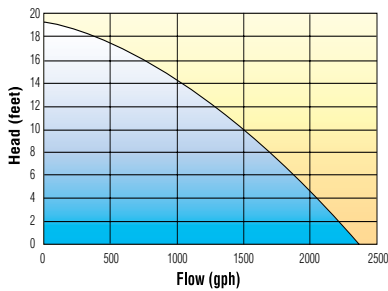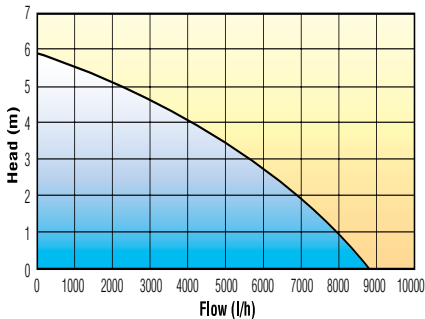

14000

Remote Control Feature

QUIET ONE 14000	
230 Volt	120 Volt
50 Hz	60 Hz
240 Watt	270 Watt
A 1,8	A 3,2
13,000 l/h	3624 gph
10.5 m max ht	34.5 ft max ht

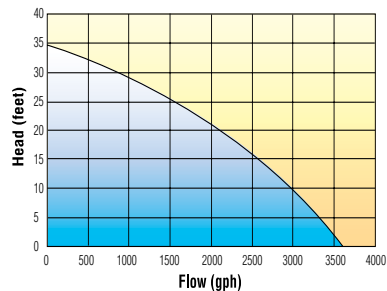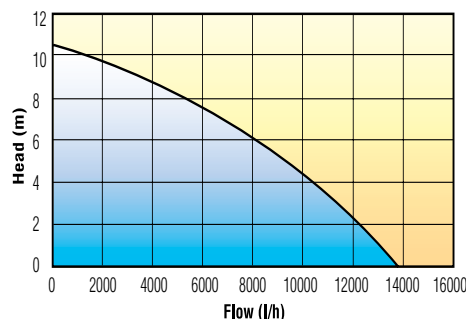

16000

QUIET ONE 16000	
230 Volt	120 Volt
50 Hz	60 Hz
255 Watt	280 Watt
A 1,9	A 3,3
16,000 l/h	4232 gph
6 m max ht	19.7 ft max ht

